



[www.FGWilson.com](http://www.FGWilson.com)

# P2000/P2250E



Image for illustration purposes only.

## Output Ratings

Voltage, Frequency	Prime	Standby
400V, 50 Hz	2000.0 kVA / 1600.0 kW	2249.2 kVA / 1799.4 kW
	- / -	- / -

Ratings at 0.8 power factor.

Please refer to the output ratings technical data section for specific generator set outputs per voltage.

## Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.


## Standby Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

## Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity.

Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

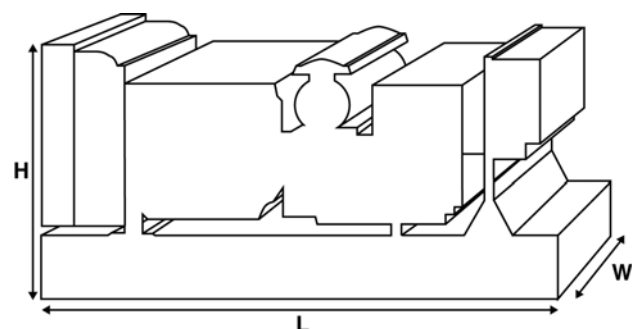

## Ratings and Performance Data

Engine Make & Model:	Perkins® 4016TAG2A	
Alternator manufactured for FG Wilson by:	Leroy Somer	
Alternator Model:	LL9224H	
Control Panel:	PowerWizard 1.1+	
Base Frame:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole ACB – Option	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	-
Fuel Tank Capacity: litres (US gal)	-	
Fuel Consumption: l/hr (US gal/hr)		
(100% Load)	- Prime	425.7 (112.5)
	- Standby	486.8 (128.6)

## Available Options

FG Wilson offer a range of optional features to tailor our generator sets to meet your power needs. Options include:

- Upgrade to CE Certification
- A wide range of Sound Attenuated Enclosures
- A variety of generator set control and synchronising panels
- Additional alarms and shutdowns
- A selection of exhaust silencer noise levels

For further information on all of the standard and optional features accompanying this product please contact your local Dealer or visit: [www.FGWilson.com](http://www.FGWilson.com)

## Dimensions and Weights

Length (L) mm (in)	Width (W) mm (in)	Height (H) mm (in)	Dry kg (lb)	Wet kg (lb)
5852 (230.4)	2300 (90.6)	3020 (118.9)	15364 (33872)	15680 (34568)
Dry = With Lube Oil		Wet = With Lube Oil and Coolant		

Ratings in accordance with ISO 8528, ISO 3046, IEC 60034, BS5000 and NEMA MG-1.22. Generator set pictured may include optional accessories.

Engine Technical Data		
No. of Cylinders / Alignment:		16 / Vee
Cycle:		4 Stroke
Bore / Stroke: mm (in)		160.0 (6.3)/190.0 (7.5)
Induction:		Turbocharged Air To Air Charge Cooled
Cooling Method:		Water
Governing Type:		Electronic
Governing Class:		ISO 8528 G2
Compression Ratio:		13.6:1
Displacement: l (cu. in)		61.1 (3730.0)
Moment of Inertia: kg m² (lb/in²)		20.72 (70803)
Engine Electrical System:		
- Voltage / Ground		24/Negative
- Battery Charger Amps		40
Weight: kg (lb)	- Dry	5570 (12280)
	- Wet	5847 (12890)

Performance	50 Hz	60 Hz
Engine Speed: rpm	1500	-
Gross Engine Power: kW (hp)		
- Prime	1766.0 (2368.2)	-
- Standby	1937.0 (2597.6)	-
BMEP: kPa (psi)		
- Prime	2311.1 (335.2)	-
- Standby	2535.2 (367.7)	-

Fuel System				
Fuel Filter Type:		Replaceable Element		
Recommended Fuel:		Class A2 Diesel or BSEN590		
Fuel Consumption: l/hr (US gal/hr)				
	110%	100%	75%	50%
Prime	Load	Load	Load	Load
50 Hz	486.8 (128.6)	425.7 (112.5)	313.1 (82.7)	213.0 (56.3)
60 Hz	-	-	-	-
		100%	75%	50%
Standby		Load	Load	Load
50 Hz		486.8 (128.6)	353.9 (93.5)	236.8 (62.6)
60 Hz		-	-	-

(Based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)

Air Systems	50 Hz	60 Hz
Air Filter Type: Replaceable Element		
Combustion Air Flow: m <sup>3</sup> /min (cfm)		
- Prime	137.0 (4838)	-
- Standby	145.0 (5121)	-
Max. Combustion Air Intake Restriction: kPa (in H <sub>2</sub> O)	3.7 (14.9)	-

Cooling System	50 Hz	60 Hz
Cooling System Capacity: l (US gal)	316.0 (83.5)	-
Water Pump Type: Centrifugal		
Heat Rejected to Water & Lube Oil:		
kW (Btu/min)	- Prime 660.0 (37534)	-
	- Standby 721.0 (41003)	-
Heat Radiation to Room: Heat radiated from engine and alternator		
kW (Btu/min)	- Prime 202.9 (11539)	
	- Standby 236.6 (13455)	
Radiator Fan Load: kW (hp)	63.5 (85.2)	-
Radiator Cooling Airflow: m <sup>3</sup> /min (cfm)	2058.0 (72678)	-
External Restriction to Cooling Airflow: Pa (in H <sub>2</sub> O)	250 (1.0)	-

Designed to operate in ambient conditions up to 50°C (122°F).  
Contact your local FG Wilson Dealer for power ratings at specific site conditions.

Lubrication System	
Oil Filter Type:	Spin-On, Full Flow
Total Oil Capacity: l (US gal)	238.0 (62.9)
Oil Pan: l (US gal)	214.0 (56.5)
Oil Type:	API CG4 15W-40
Oil Cooling Method:	Water

Exhaust System	50 Hz	60 Hz
Silencer Type: Industrial		
Silencer Model & Quantity: IND-Option (1)		
Pressure Drop Across Silencer System: kPa (in Hg)		
	-	-
Silencer Noise Reduction Level: dB	17	-
Maximum Allowable Back Pressure: kPa (in Hg)	6.6 (1.9)	-
Exhaust Gas Flow: m <sup>3</sup> /min (cfm)		
- Prime	387.0 (13667)	-
- Standby	387.0 (13667)	-
Exhaust Gas Temperature: °C (°F)		
- Prime	493 (919)	-
- Standby	493 (919)	-

Alternator Operating Data	
<b>Overspeed:</b> rpm	2250
<b>Voltage Regulation:</b> (Steady state)	+/- 0.5%
<b>Wave Form NEMA = TIF:</b>	50
<b>Wave Form IEC = THF:</b>	2.0%
<b>Total Harmonic content LL/LN:</b>	3.5%
<b>Radio Interference:</b>	Suppression is in line with European Standard EN61000-6
<b>Radiant Heat:</b> kW (Btu/min)	
- 50 Hz	86.6 (4925)
- 60 Hz	-

Reactances shown are applicable to prime ratings.  
\*Based on 30% voltage dip at 0.4 power factor.  
\*\*With optional permanent magnet generator.

[illegible]

### Documentation

A full set of operation and maintenance manuals and circuit wiring diagrams.

### Generator Set Standards


The equipment meets the following standards: BS5000, ISO 8528, ISO 3046, IEC 60034, NEMA MG-1.22.

FG Wilson is a fully accredited ISO 9001 company.

### Warranty

All prime equipment carries a one year manufacturer's warranty with unlimited hours or two year manufacturer's warranty limited to 6,000 running hours. Standby equipment, limited to 500 running hours per year, has a three year manufacturer's warranty.

### Dealer contact details:



### FG Wilson manufactures product in the following locations:

Northern Ireland • Brazil • China • India • USA

With headquarters in Northern Ireland, FG Wilson operates through a Global Dealer Network.

To contact your local Sales Office please visit the FG Wilson website at [www.FGWilson.com](http://www.FGWilson.com).

FG Wilson is a trading name of Caterpillar (NI) Limited.

In line with our policy of continuous product development, we reserve the right to change specification without notice.